


Customer approval : _____

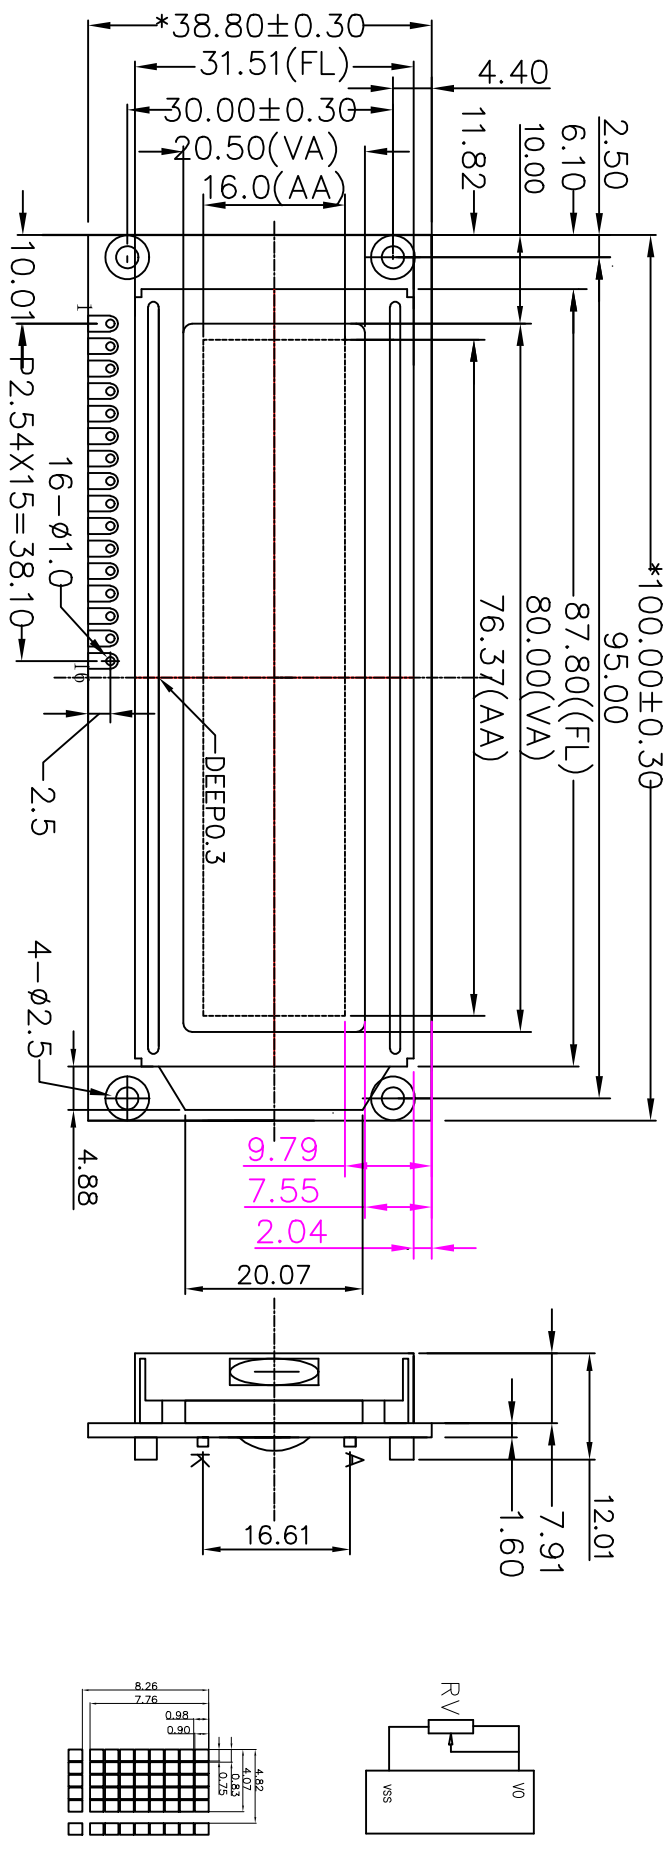


SPECIFICATION:

- 1). Driving: Duty:1/16, Bias:1/5, Vdd:5.0V, Vlcd:4.5V
- 2). Viewing Direction: 12 O'CLOCK
- 3). Display mode: STN/Blue/Negative/Transmissive
- 4). Operating temp.: -10°C~+60°C
- 5). Storage temp.: -20°C~+70°C
- 6). Control IC: ST7066U-0B
- 7). Backlight: Edge, White(2Dices, ILED=30mA, BLA=5.0V)
- 8). Dimensions With Mark "*" Are Important
With Mark "(") Are Referenced
- 9). All the raw materials are RoHS compliant

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
CONNECTION	VSS	VDD	VO	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	BLK	BLA

REV	REVISION RECORD	DATE
A0	First issue	11/16

 深圳市三元晶科技有限公司 ShenZhen TCC LCD Hi-Tech Co., Ltd		MODEL NO.	SYB1602JV11-5C10BL-B5NG		GENERAL TOL: ± 0.3
APPROVED BY	CHECKED BY	DRAWING BY	LSS	FC	LGU
PAGE?			1 OF 1		UNIT: mm
PROJECTION					