


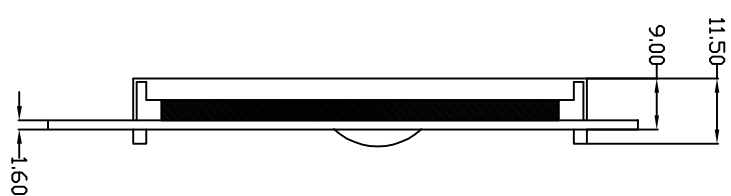



Customer approval :

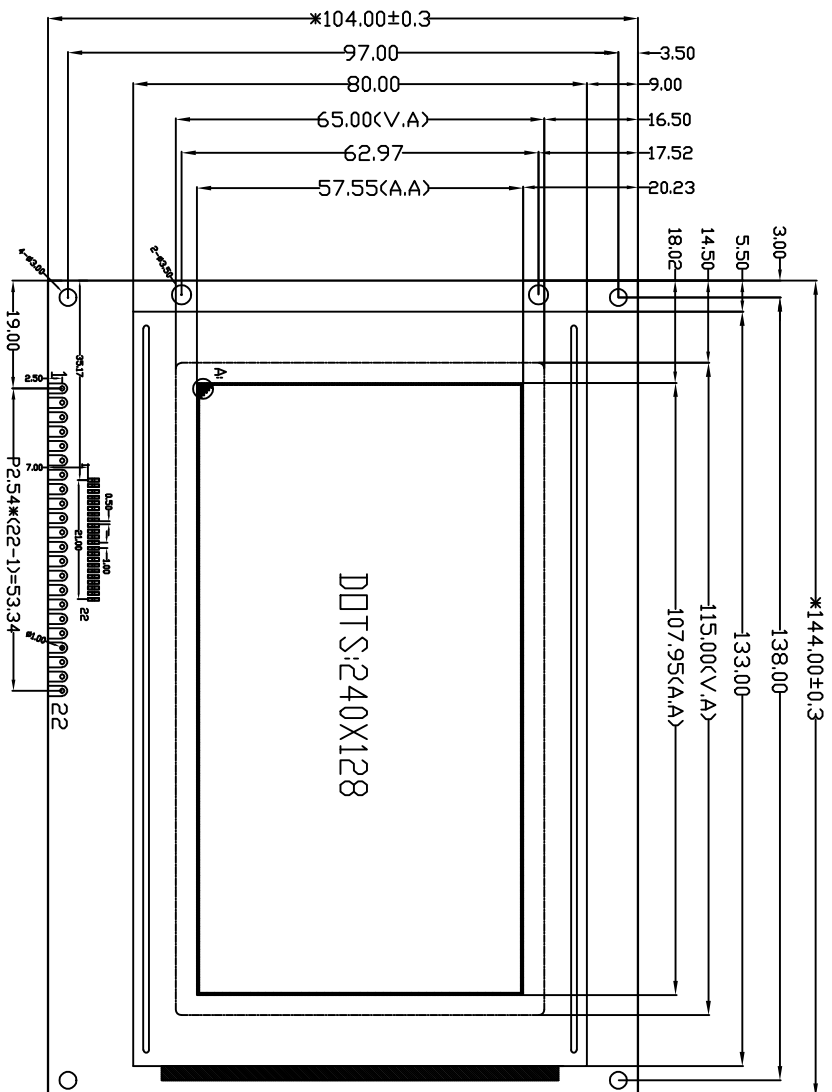


SPECIFICATION:

- 1). Driving: Dots:240*128, DUTY:1/128, BIAS:1/12, VDD:5.0V, VOUT:-14V, VO:-12.4V
- 2). Viewing angle: 6 0'CLOCK
- 3). Display mode:STN/Blue Mode/Transmissive/Negative or STN/Positive/Transflective/Y-G
- 4). Operating temp: -20° C~+70° C
Storage temp: -30° C~+80° C
- 5). Controller IC: RA8835AP3N (Or Compatible)
- 6). Backlight: White or Y-g
- 7). Dimensions with mark "*" are important, with mark "()" are referenced
- 8). All the raw materials are RoHS compliant

PIN	1	2	3	4	5	6	7	8	9	10	11
CONNECTION	FG	GND	VDD	VO	WR	RD	CE	AO	RES	DB0	DB1
PIN	12	13	14	15	16	17	18	19	20	21	22
CONNECTION	DB2	DB3	DB4	DB5	DB6	DB7	NC	VOUT	BLA	BLK	NC

REVISION RECORD	REV	REV	 深圳市三元晶科技有限公司 Shenzhen TCC LCD Hi-Tech Co., Ltd.	
First issue	A0		DRAWING NO.	SYB240128A5V11
			APPROVED BY	CHECKED BY
			DRAWING BY	UNIT:
			LAN	mm
			2013/03/29	PAGE
				1/1

REVISION RECORD	REV	REV	 深圳市三元晶科技有限公司 Shenzhen TCC LCD Hi-Tech Co., Ltd.	
First issue	A0		DRAWING NO.	SYB240128A5V11
			APPROVED BY	CHECKED BY
			DRAWING BY	UNIT:
			LAN	mm
			2013/03/29	PAGE
				1/1