


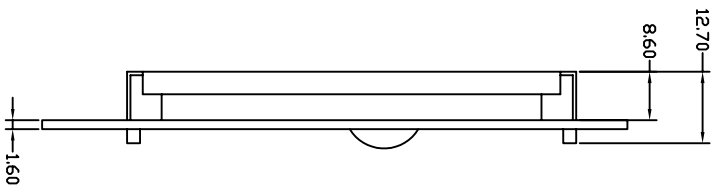


Customer approval :

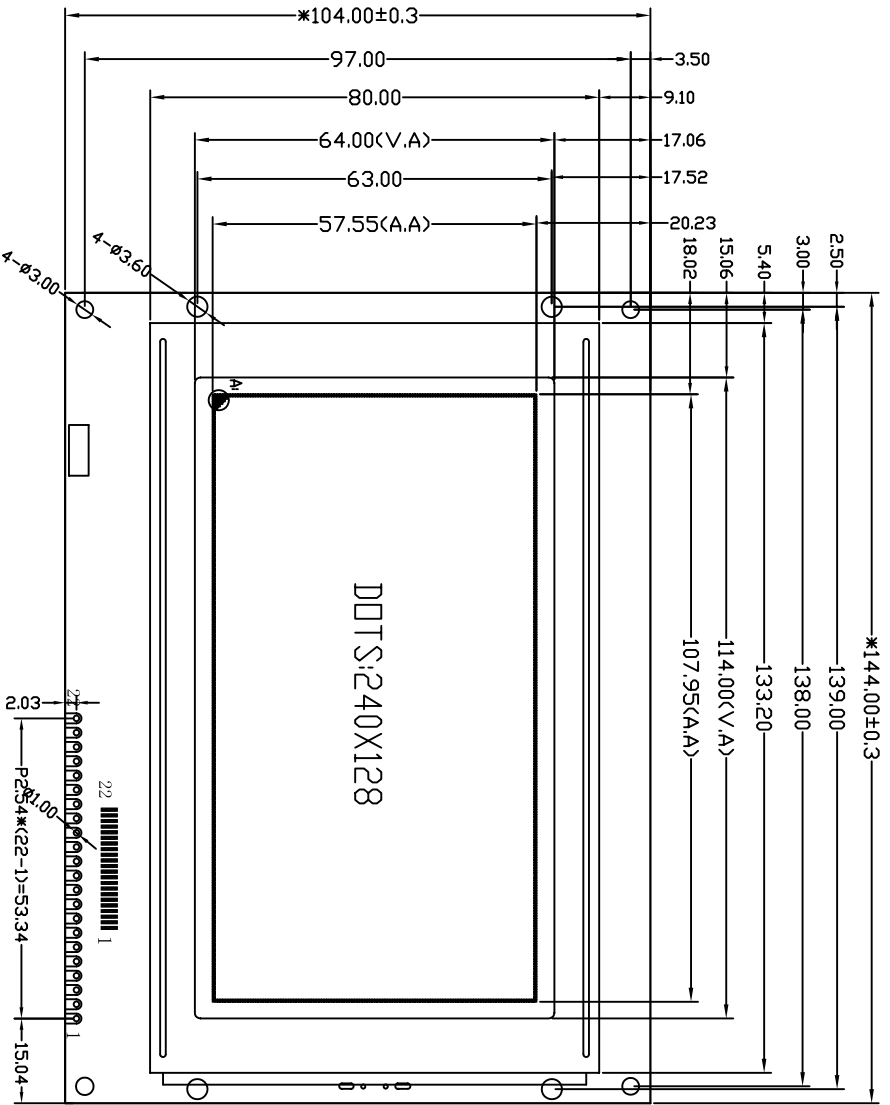

Specification:

- 1). Driving: Dots:240*128, Duty:1/128, Bias:1/12,VDD:5V, VOUT:-15.5V,V0:-12.5V
- 2). Viewing Direction: 6 O'clock
- 3). Display mode:STN/BLUE MODE/TRANSMISSIVE/NEGATIVE
- 4). Operating temp.: -20°C~+70°C
Storage temp.: -30°C~+80°C
- 5). Controller IC:T6963
- 6). Backlight: Bottom ,White
- 7). Dimensions with mark "*" are important, with mark "()" are referenced
- 8). All the raw materials are RoHS compliant

PIN	1	2	3	4	5	6	7	8	9	10	11 ~ 18	19	20	21	22
CONNECTION	FG	GND	VDD	VO	WR	RD	CS	RS	NC	RST	DB0~DB7	FS	VOUT	BLA	BLK

REVISION RECORD

First issue

REV

A0



深圳市三元晶科技有限公司
ShenZhen TCC LCD Hi-Tech Co., Ltd.

DRAWING NO. SYM240128A3V10

GENERAL TOT: ±0.2

APPROVED BY

CHECKED BY

DRAWING BY

UNIT: mm

PAGE

LHL



1/1

2013/03/08